

Endodontie

DE

Endodontics

EN

Endodontie

FR

Endodonica

ES



DE Typen und Formen der Endodontie
EN Types and shapes of endodontics
FR Types et formes d'instruments de l'endodontie
ES Tipos y formas de instrumentos de endodoncia





Fig.	171P	173P	174P	173PF	174PF	9107P	178L	178S	180GRF	183RF	191RF
Page	153	153	153	154	154	154	154	154	154	155	155



Fig.	Spreader	38R	C36R	C151	C152	389	851L	857
Page	155	155	155	155	156	156	156	156

i

Hygiene



DE Farbcodierung Schaft
EN Colour code shank
FR Code couleur tige
ES Código de colores del vástago




ISO Ø	006	008	010
-------	-----	-----	-----



ISO Ø	015	020	025	030	035	040
-------	-----	-----	-----	-----	-----	-----



ISO Ø	045	050	055	060	070	080
-------	-----	-----	-----	-----	-----	-----





DE	Endodontie Instrumente
EN	Endodontics instruments
FR	Instruments d'endodontie
ES	Instrumentos de endodoncia




K Reamer

Feile, Typ K
file, type k



Fig	L mm	ISO	Ø							
Handgriff kurz, Kunststoff Handle short, plastic										



171P	25	340 654 640 451 -	008	010	015	020	025	030	035	040
171PS1	25	340 654 640 451 -	Set 1 (015-040)							

	6	6	6	6	6	6	6	6	6
--	---	---	---	---	---	---	---	---	---




K File

Feile, Typ K
file, type k



Fig	L mm	ISO	Ø							
Handgriff kurz, Kunststoff Handle short, plastic										



173P	25	340 654 646 452 -	006	008	010	015	020	025	030	035	040
173PS1	25	340 654 646 452 -	Set 1 (015-040)								

		6	6	6	6	6	6	6	6
--	--	---	---	---	---	---	---	---	---




Hedstroem File

Feile, Typ H
file, type H



Fig	L mm	ISO	Ø							
Handgriff kurz, Kunststoff Handle short, plastic										



174P	25	340 654 651 453 -	008	010	015	020	025	030	035	040
174PS1	25	340 654 651 453 -	Set 1 (015-040)							

	6	6	6	6	6	6	6	6	6
--	---	---	---	---	---	---	---	---	---





Flex K File

Feile, Typ K
file, type K

Fig	L mm	ISO	Ø			
-----	------	-----	---	--	--	--

Handgriff kurz, Kunststoff | Handle short, plastic



173PF	25	340 654 646 452 -	F15	F20	F25	F30	F35	F40
173PFS1	25	340 654 646 452 -	Set 1 (F15-F40)					

	6	6	6	6	6	6
--	---	---	---	---	---	---

Application




Flex Hedstroem File

Feile, Typ H
file, type H

Fig	L mm	ISO	Ø			
-----	------	-----	---	--	--	--

Handgriff kurz, Kunststoff | Handle short, plastic



174PF	25	340 654 651 453 -	F15	F20	F25	F30	F35	F40
174PFS	25	340 654 651 453 -	Set 1 (F15-F40)					

	6	6	6	6	6	6
--	---	---	---	---	---	---

Application



9107P

Nervnadel / Extirpationsnadel
Barbed Broaches

Fig	L mm	ISO	Ø			
-----	------	-----	---	--	--	--

Handgriff kurz, Kunststoff | Handle short, plastic



9107P	22	340 634 657 455 -	025	030	035	040
9107PS	22	340 634 657 455 -	Set (025, 2x030, 2x035, 040)			

	6	6	6	6
--	---	---	---	---

Application



Lentulo

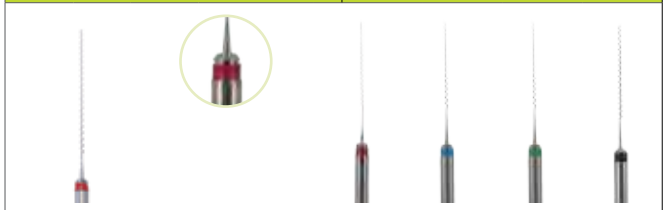
Wurzelfüller, ohne Sicherheitsspirale
paste carrier, without safety spiral

Fig	L mm	Shank	ISO	Ø			
-----	------	-------	-----	---	--	--	--

Winkelstück | Right angle



178L	21	RA	340 204 675 458 -	025	030	035	040
178LS	21	RA	340 204 675 458 -	Set (025-40)			
178L	25	RA	340 204 676 458 -	025	030	035	040
178LS	25	RA	340 204 676 458 -	Set (025-040)			

	6	6	6	6
--	---	---	---	---

Application



Rotation speed 300 - 600 rpm

Lentulo S

Wurzelfüller, mit Sicherheitsspirale
paste carrier, with safety spiral

Fig	L mm	ISO	Ø			
-----	------	-----	---	--	--	--

Handgriff kurz, Kunststoff | Handle short, plastic



178S	21	340 204 672 458 -	025	030	035	040
178SS	21	340 204 672 458 -	Set (025-040)			
178S	25	340 204 673 458 -	025	030	035	040
178SS	25	340 204 673 458 -	Set (025-040)			

	6	6	6	6
--	---	---	---	---

Application



Rotation speed 300 - 600 rpm

Gates

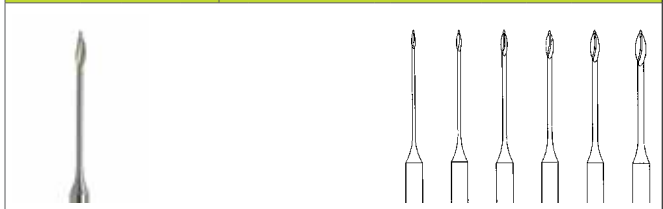
Erweiterer, Typ G, mit Führungszapfen rostfreier Stahl
enlarger, type G, with guiding tip stainless steel

Fig	L	Tot. L	Shank	ISO	Ø				
-----	---	--------	-------	-----	---	--	--	--	--

Winkelstück | Right angle

180GRF	15	28	RA	330 205 679 336 -	050	070	090	110	130	150
180GRFS	15	28	RA	330 205 679 336 -	Set (050-150)					
180GRF	19	32	RA	330 206 679 336 -	050	070	090	110	130	150
180GRFS	19	32	RA	330 206 679 336 -	Set (050-150)					

	6	6	6	6	6	6
--	---	---	---	---	---	---

Application



Rotation speed 800 - 1'200 rpm





Peeso

Erweiterter, Typ P, mit Führungszapfen rostfreier Stahl
enlarger, type P, with guiding tip stainless steel

Fig	L	Tot. L	Shank	ISO	Ø					
Winkelstück Right angle										
183RF	15	28	RA	330 205 682 336 -	070	090	110	130	150	170
183RFS	15	28	RA	330 205 682 336 -	Set (070-170)					
183RF	19	32	RA	330 206 682 336 -	070	090	110	130	150	170
183RFS	19	32	RA	330 206 682 336 -	Set (070-170)					

Application Rotation speed 800 - 1'200 rpm

191RF

Pulpabohrer, Typ Müller, extra lang, rostfreier Stahl
sperical bur, Müller type, extra long, stainless steel

Fig	L mm	Shank	ISO	Ø				
Winkelstück Right angle								
191RF	18	RA	330 206 698 001 -	100	120	140	160	180
191RFS	18	RA	330 206 698 001 -	Set (100-180)				

Application Rotation speed 800 - 1'200 rpm

Spreader

Füllungsverteiler, spitz
filling condenser, round tip

Fig	L mm	ISO	Ø					
Handgriff kurz, Kunststoff Handle short, plastic								
Spreader	25	340 654 632 467 -	015	020	025	030	035	040
Spreader	25	340 654 632 467 -	Set (015-040)					

Application

38R

konisch rund
conical domed

Fig	Shank	ISO	Ø		
38R	RA L	310 205 196 002 -	012	014	016

L mm	Ø		
5,0	5,0	5,0	5,0
5	5	5	5

Application

C36R

zylindrisch, Stirn rund
conical domed, end hemispherical

Fig	Shank	ISO	Ø
Turbine Friction Grip			
C36R	FG	504 314 139 008 -	012
C36R	FG XL	504 316 139 008 -	012

US-No.	Ø
	1958
L mm	Ø
	4,0
Ø	Ø
	5

Application

C151 Zekrya

konisch rund
conical pointed

Fig	Shank	ISO	Ø
Turbine Friction Grip			
C151	FG L	500 315 199 295 -	016
C151	FG XL	500 316 199 295 -	016

L mm	Ø
	10,5
Ø	Ø
	2

Application



C152 Endo Z konisch rund
conical pointed

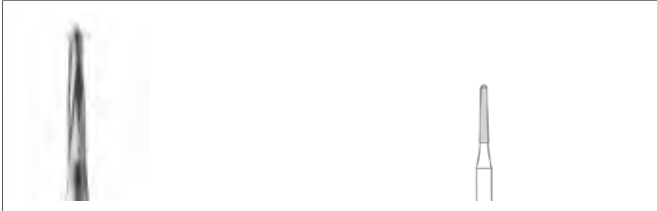


Fig	Shank	ISO	Ø	
Turbine		Friction Grip		
C152	FG L	500 315 210 295 -	014	

L mm	Ø
9,0	
2	

Application



389 rund mit konischem Ansatz, lang
spherical with conical collar, long

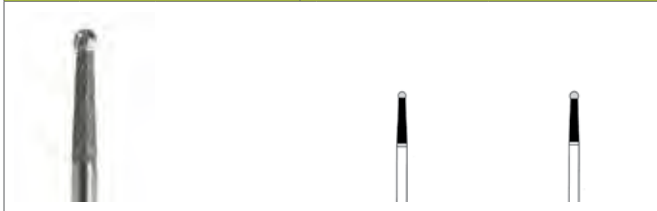


Fig	Shank	ISO	Ø	
Turbine		Friction Grip		
389	FG XL	806 316 494 020 -	012	014

L mm	Ø
8,0	8,0
5	5

Application



851L konisch, Stirn rund, nur Seite schneidend
spherical with conical collar, long

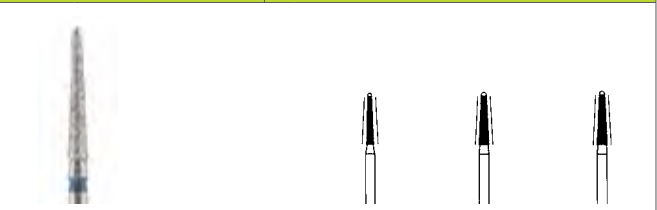


Fig	Shank	ISO	Ø		
Turbine		Friction Grip			
851L	FG	806 314 219 524 -	012	016	018

L mm	Ø
8,0	8,0
5	5

Application



857 konisch, Stirn rund, nur Seite schneidend
spherical with conical collar, long

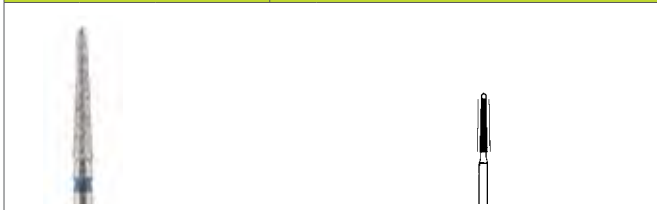


Fig	Shank	ISO	Ø	
Turbine		Friction Grip		
857	FG	806 314 220 524 -	014	
857G	FG	806 314 220 534 -	014	
857F	FG	806 314 220 514 -	014	

L mm	Ø
10,0	
5	

Application

